


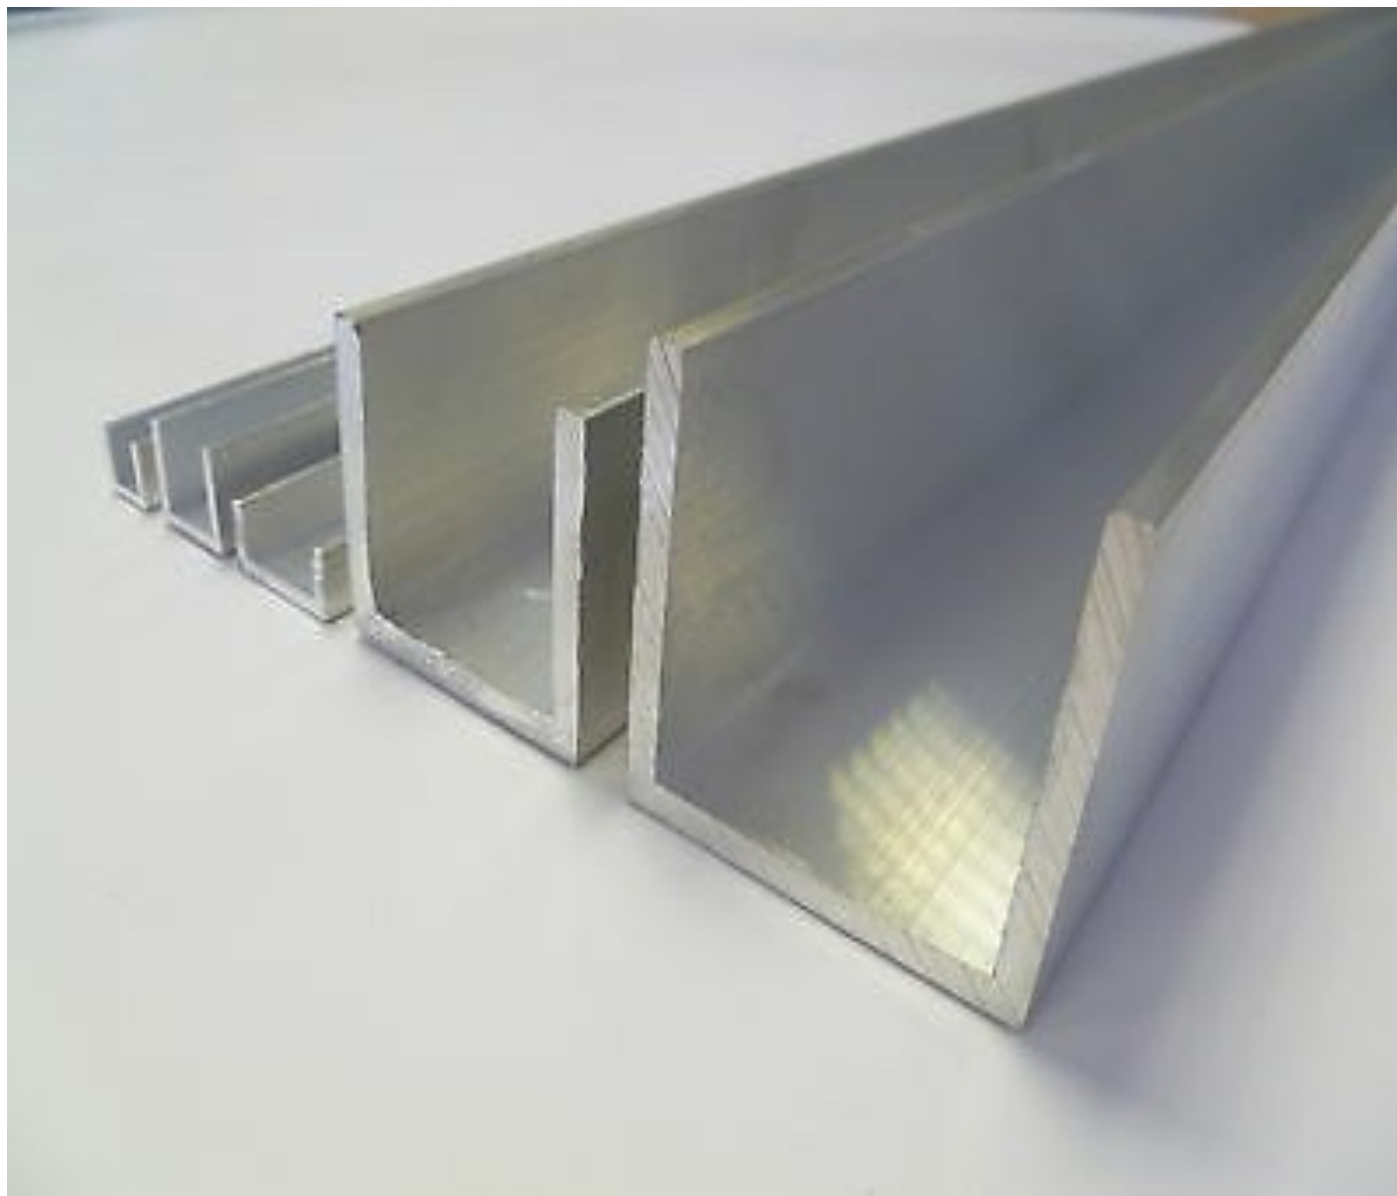


PUBLICATION DATE: 01 NOVEMBER 2019


U-CHANNEL

ALUMINIUM

www.kamcoaluminium.com | sales@kamcoaluminium.com

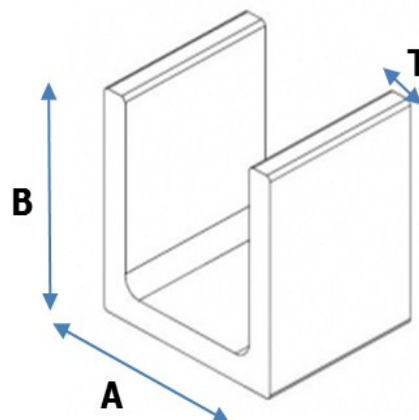

HORIZONTAL A (inch)	HORIZONTAL A (mm)	VERTICAL B (inch)	VERTICAL B (mm)	THICKNESS T (inch)	THICKNESS T (mm)	WEIGHT (kg/m)	PERIMETER (mm)
1/2	12.700	1/2	12.700	3/64	1.191	0.08	50.800
1/2	12.700	1/2	12.700	1/16	1.588	0.10	50.800
1/2	12.700	5/8	15.875	2.0	2.000	0.14	57.150
1/2	12.700	1	25.400	3/64	1.191	0.12	76.200
3/4	19.050	1/2	12.700	3/64	1.191	0.10	63.500
3/4	19.050	3/4	19.050	3/64	1.191	0.12	76.200
3/4	19.050	3/4	19.050	1/16	1.588	0.16	76.200
3/4	19.050	3/4	19.050	2.0	2.000	0.20	76.200
3/4	19.050	3/4	19.050	1/8	3.175	0.30	76.200
3/8	9.525	3/8	9.525	3/64	1.191	0.06	38.100
5/8	15.875	3/8	9.525	1.0	1.000	0.07	50.800
5/8	15.875	5/8	15.875	3/64	1.191	0.10	63.500
5/8	15.875	5/8	15.875	1/16	1.588	0.13	63.500
5/8	15.875	5/8	15.875	2.0	2.000	0.16	63.500
1	25.400	1/2	12.700	3/64	1.191	0.12	76.200
1	25.400	1	25.400	3/64	1.191	0.16	101.600
1	25.400	1	25.400	1/16	1.588	0.21	101.600
1	25.400	1	25.400	2.50	2.500	0.33	101.600
1	25.400	1	25.400	1/8	3.175	0.41	101.600
1 1/2	38.100	1/2	12.700	3/64	1.191	0.16	101.600
1 1/2	38.100	1/2	12.700	2.00	2.000	0.26	101.600
1 1/2	38.100	3/4	19.050	1/8	3.175	0.46	114.300
1 1/2	38.100	5/8	15.875	2.00	2.000	0.28	107.950
1 1/2	38.100	1	25.400	1/16	1.588	0.27	127.000
1 1/2	38.100	1	25.400	1/8	3.175	0.52	127.000
1 1/2	38.100	1 1/2	38.100	1/8	3.175	0.63	152.400
1 1/4	31.750	1/2	12.700	1/16	1.588	0.18	88.900
1 1/4	31.750	3/4	19.050	1.0	1.000	0.13	101.600
1 1/4	31.750	1 1/2	38.100	1/8	3.175	0.57	139.700
1 1/4	31.750	1 1/4	31.750	1/8	3.175	0.52	127.000
1 3/4	44.450	1/2	12.700	3/64	1.191	0.18	114.300
1 3/4	44.450	1	25.400	2.00	2.000	0.37	139.700
1 3/4	44.450	1	25.400	1/8	3.175	0.57	139.700

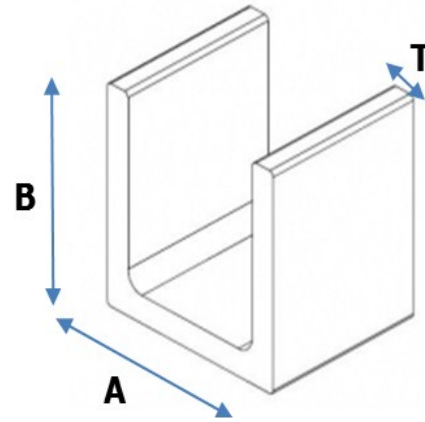

HORIZONTAL A (inch)	HORIZONTAL A (mm)	VERTICAL B (inch)	VERTICAL B (mm)	THICKNESS T (inch)	THICKNESS T (mm)	WEIGHT (kg/m)	PERIMETER (mm)
1 3/8	34.925	1 1/4	31.750	1/8	3.175	0.55	133.350
1 7/8	47.625	1	25.400	1/16	1.588	0.31	146.050
1 3/16	30.163	3/4	19.050	1/8	3.175	0.40	98.425
2	50.800	1/2	12.700	3/64	1.191	0.20	127.000
2	50.800	1/2	12.700	1/16	1.588	0.27	127.000
2	50.800	1	25.400	3/64	1.191	0.24	152.400
2	1	1/16	50.800	25.400	1.588	0.32	152.400
2	1	1/8	50.800	25.400	3.175	0.63	152.400
2	1	1/4	50.800	25.400	6.350	1.20	152.400
2	1 1/2	1/8	50.800	38.100	3.175	0.74	177.800
2	2	2.00	50.800	50.800	2.000	0.54	203.200
2	2	1/8	50.800	50.800	3.175	0.85	203.200
2	2	3/16	50.800	50.800	4.763	1.25	203.200
2 1/4	1 1/2	1/8	57.150	38.100	3.175	0.79	190.500
2 3/8	1 1/2	3/16	60.325	38.100	4.763	1.21	196.850
3	1/2	3/64	76.200	12.700	1.191	0.28	177.800
3	1/2	1/16	76.200	12.700	1.588	0.38	177.800
3	1	1/16	76.200	25.400	1.588	0.43	203.200
3	1	1/8	76.200	25.400	3.175	0.85	203.200
3	1 1/2	1/4	76.200	38.100	6.350	1.86	228.600
3	1 5/8	1/4	76.200	41.275	6.350	1.91	234.950
4	1	1/16	101.600	25.400	1.588	0.54	254.000
4	1 1/4	1/4	101.600	31.750	6.350	2.19	266.700
4	2	1/8	101.600	50.800	3.175	1.28	304.800
4	2	1/4	101.600	50.800	6.350	2.51	304.800
4 1/4	1 1/8	1/8	107.950	28.575	3.175	1.15	273.050
6	1	1/4	152.400	25.400	6.350	2.95	355.600
6	3	1/4	152.400	76.200	6.350	3.82	457.200